

Mahajak Electric (Thailand) Co., Ltd.

Address: 5 Soi Prayamonthat 20 Klongbangbon Bangbon Bangkok Thailand 10150

Tel : +662-8990052-4

Fax. : +662-8990738

e-mail : info@pioneerlevator.com

website : www.mahajakelectric.com

บริษัท มหาจักร อลิคทริค (ประเทศไทย) จำกัด

ที่อยู่: เลขที่ 5 ซอยพระยามณเฑาะฯ แยก 20 แขวงคลองบางบอน เขตบางบอน กรุงเทพมหานคร 10150 ประเทศไทย

โทร : +662-8990052-4




แฟกซ์ : +662-8990738

e-mail : info@pioneerlevator.com

website : www.mahajakelectric.com

Innovative LEHY Advanced Technology

With its exquisite design, LEHY-MRL elevator effectively saves the installation space, increases the construction utilization and improves the construction appearance. LEHY-MRL could adopt independent or non-independent structure according to the clients' hoistway, which grant the clients more flexibility in construction design.

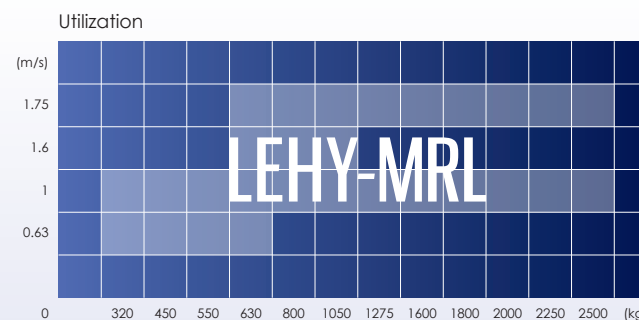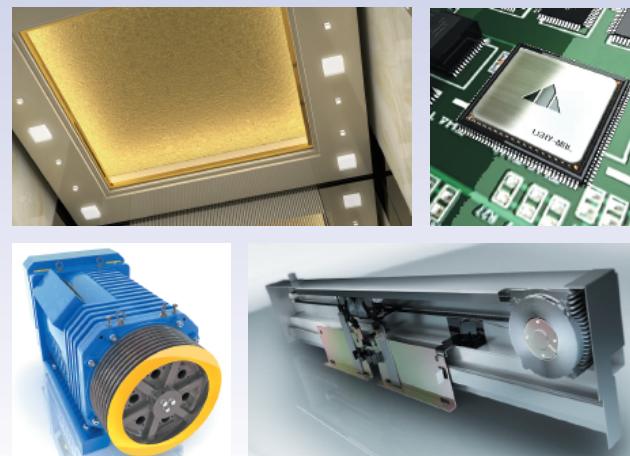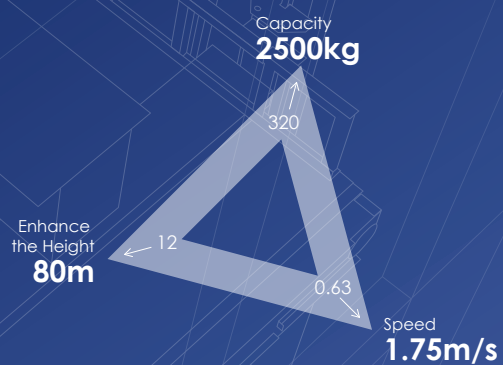


Technical Features and Technological Innovation	P.3
A new generation of Decoration system	P.4

Integrative Car Design	P.6
Design of Car Roof	P.19
Car Operation Panel	P.22
Landing Display and Landing Call	P.26
Flexible and Replaceable Button Series	P.28
Hall Design	P.29
LCD Display Series	P.31
Corresponding Material	P.32

Feature List	P.33
--------------	------

Civil Construction Drawings	P.35
Civil Construction Table	P.36

Basic Specifications	P.37
----------------------	------

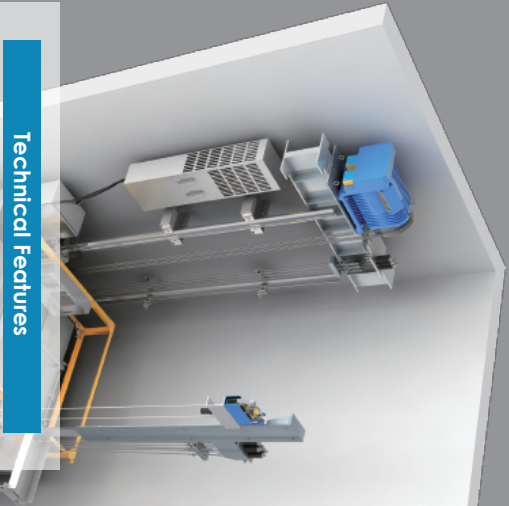

Technical Features

- 1 Innovative Structure without Machine Room**
Adopt patented innovative structure to realize machine-roomless layout of the elevator, enriching space utilization ratio of building, reducing the influence of the elevator on the appearance of the building and the design and layout of the building maybe more free.
- 2 Small-scale Control Cabinet**
Newly designed control cabinet adopts 32 bits CPU, 32 bits high-speed digital signal processor (DSP) and large-scale field programmable gate array (FPGA) and other high performance chips, realizing monolithic, modular and thin design of control cabinets.

3 Variable Velocity Variable Frequency (VVVF) Control Technology, Complete Digital Control Technology

With profound knowledge and continuous application of the state-of-the-art technologies and devices in VVVF driving of elevators, ensuring that the development of Shanghai Mitsubishi VVVF speed regulating technology is facing the direction of high performance, high reliability, digitalization and small scale. Realize speed regulation of the elevator by Space Vector Pulse Width Modulation (SVPWM). Adopt the internationally newest 6th high-power module, 32 bits high-speed digital signal controller (DSC), large-scale integrated circuit and other advanced electronic components, and the motor rotary speed of the elevator may thus be precisely regulated by following the best speed variation curve and the elevator may be operated in accordance with the ideal speed curve, optimized and designed on the basis of modern ergonomic principles, realizing truly complete digital control and motor driving and thus therefore the elevator may operate stably, safely and efficiently.

Technological Innovation

- 1 Energy Feedback Technologies (Optional)**
Elevator may need to acquire energy from the power supply (motor drive condition) sometimes when it is operating; however, when the car's moving downward with heavy duty or moving upward with light duty, the electromotor will be in the generating condition (energy feedback status) and this kind of electricity may be consumed normally in the form of resistance heating, which may lead to energy consumption and is not environment friendly.
The energy feedback technology (optional) based on PWM control feeds back the power generated when the motor is in generating status to the grid and the energy saving may reach about 30%. If compared with elevators without energy feedback devices. Meanwhile, the input current of the supply side will be turned into sinusoidal waveform, greatly reducing the harmonic wave pollution on the power supply. The voltage control of the direct current side will be beneficial to enhance the stability of elevator operation.

2 New Generation of High Power Modules

Adopt firstly in the industry the newest high power module system. The circuit with multiple fast protection provides better protection for power modules, further enhancing the reliability of the driving system. Meanwhile, plug-in connection between the driving control circuits of the power modules and the power modules further enhances the anti-interference ability of the system.

3 Complete Digitalized Smart Power Supply System

Utilize complete digital controlled smart DC-DC power supply technology as a substitute of the three-phase power transformer, providing power supply to the elevator control system. New power system may be more stable and reliable and more resistant to the influence of fluctuation of power system as well as with lower energy consumption, higher efficiency and more comprehensive protection.

4 High Performance and Smart CPU Control System

Adopt 32 bits CPU, 32 bits high speed DSC, large scale FPGA and other high performance chips and Internationally advanced SMT technology to realize complete digital control and motor driving, further improving the control performance and reliability of the system and complete ensuring the comfort and safety of the elevator.




A new Generation of Decoration System

Universal decoration system applies to all LEHY elevators of Shanghai Mitsubishi, including LEHY-III, LEHY-MRL, LEHY-AM, LEHY-H and etc. On the basis of full preliminary surveys and demand collection analysis, the flexibility and responsiveness of the brand new developed new decoration configuration are enhanced, greatly providing the customers with choices of different grades and styles.

Easy to install Wall-mounted Call

Call without bottom box does not require reservation of rectangular holes on the wall but small round holes on the wall for installation. The construction is easier and the installation is more convenient.



Easily Recognizable Micro-light Buttons

Micro-light design for standby status of buttons improves the recognition of the button numbers, ensuring that the floor numbers on the buttons may be read fast under dim environment.



Brand new Designed Integrated Cars Apply to a Variety of Architectural Styles



The brand new designed integrated cars apply to a majority of architectural occasions, providing various styles and satisfying diversified customer requirements:

- No additional decoration layer, and the space is more saving and the cost is lower.
- Leave the factory one time and save time and energy.
- Original quality, safe and secure.


Energy Saving and Environment Friendly LED Lighting





The car roofs of LEHY-MRL are all changed into LED lighting, which has a service life 5 times longer than the traditional fluorescent tubes, saving at least 50% electrical cost and thus greatly reducing the maintenance and use costs.



Durable Buttons

The button life reaches up to 5 million times. The reinforced stainless steel button caps designed dedicated for residential elevators adopts anti-falling hook design, which may be resistant to sabotage. (The hook relief from a height of 0.5m to the button surface for three times and the button can still work normally.)


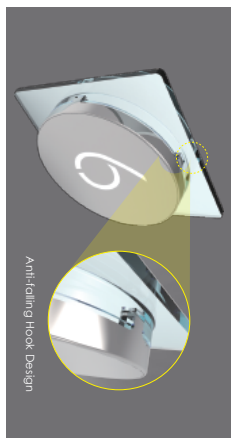


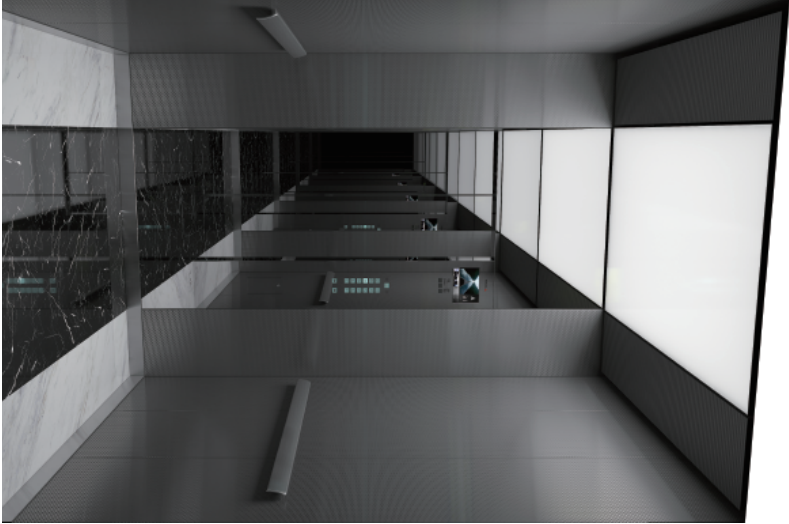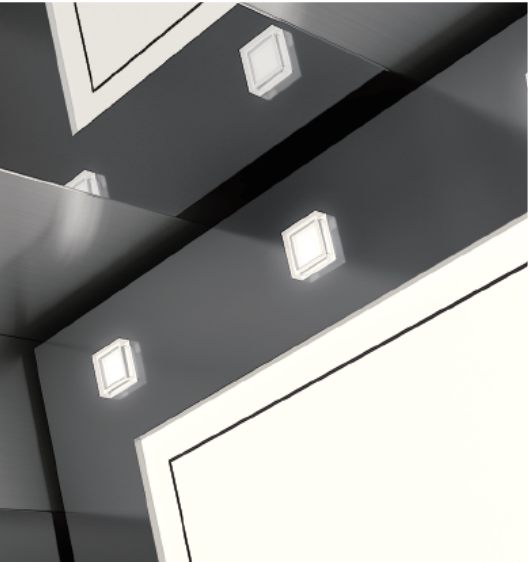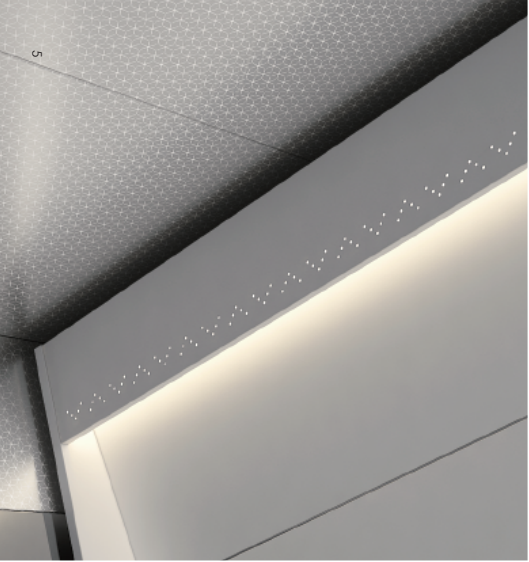

- Pinzun Cabinet / ZCD-020G LED**
- Car Ceiling**
 - ZCL-DS12
- Operation Panel**
 - ZCBDO-1-1710(Priary) / ZCBDO-1-17-60(Auxiliary)
- Front Wall**
 - (Mirror Panel) (Can select other models)
- Side Walls**
 - Mirror Stainless Steel
- Back Wall**
 - Haifine Etched Titanium Pored Stainless Steel (ZHF-003+ZDT-005)
- Two Sides with Haifine Etched Titanium-coated Stainless Steel**
 - (ZHF-003+ZDT-005)
- Central Mirror Stainless Steel**
- Car Door**
 - Mirror Stainless Steel
- Uniel**
 - Mirror Stainless Steel
- Handalls**
 - Two-side Stainless Steel Oblique Handrail (ZYH-SH01)
- Floor**
 - (Can provide none or select other models)
- Marble Floor (ZSC-001)** (Can select other models)



Modern Simple

Note: If you have any other requirements for car configuration, please contact the Business Department of our company.

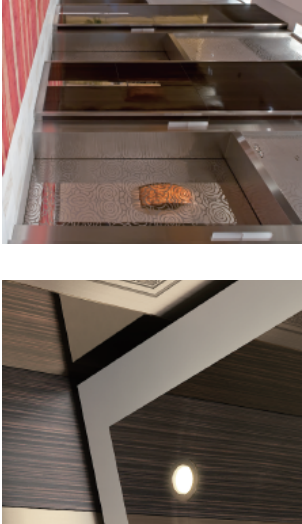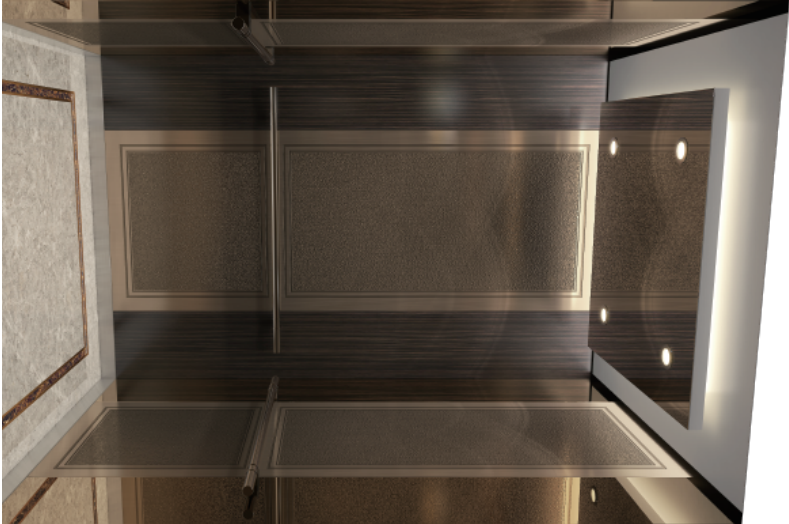


New Classics

- Jueshi House / ZCD-022X LED**
- Car Ceiling**
ZCL-GS08
 - Operation Panel**
ZCB802-1710
(Mirror Titanium-coated ZDT-006 Panel) (Can select other models)
 - Front Wall**
Mirror Titanium-coated Stainless Steel (ZDT-006)
 - Side Walls**
Two-side Mirror Titanium-coated Stainless Steel (ZDT-006)
Central Halolime Etched and Antique Bronze Threaded Stainless Steel (ZHF-002)
 - Back Wall**
Two-side Pressed-film Steel Sheet (ZYM-016)
Central Halolime Etched and Antique Bronze Threaded Stainless Steel (ZHF-002)
 - Car Door**
Mirror Titanium-coated Stainless Steel (ZDT-006)
 - Lintel**
Mirror Titanium-coated Stainless Steel (ZDT-006)
 - Handrails**
Three-side Stainless Steel Round Handrails (ZYH-RH01)
(Can provide none or select other models)
 - Floor**
Marble Floor (ZSC-014) (Can select other models)

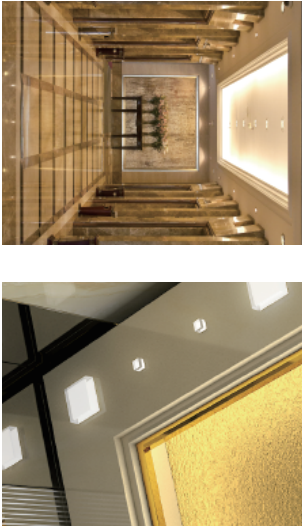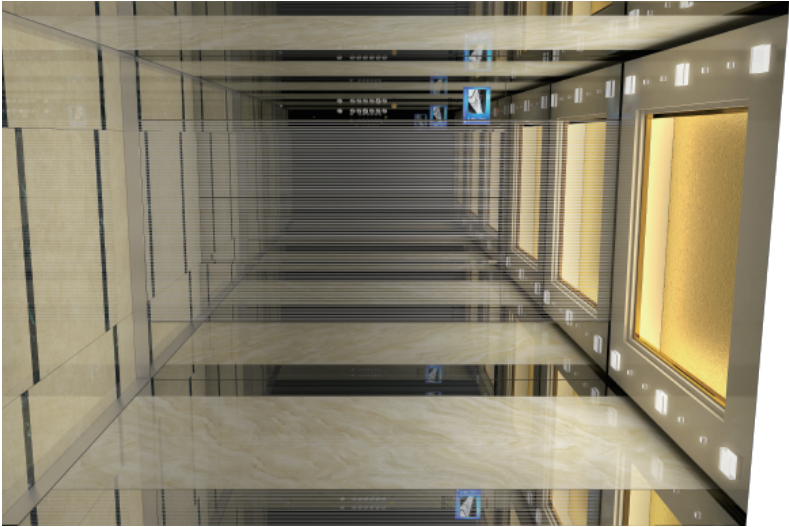


Modern Luxury

- Guixin House / ZCD-019X LED**
- Car Ceiling**
ZCL-GS16 (Color code: Y033)
 - Operation Panel**
ZCBAT1-1710
(Mirror Panel) (Can select other models)
 - Front Wall**
Mirror Stainless Steel
 - Side Walls**
Two-side Mirror Stainless Steel
Central Laminated Steel Sheet (ZYM-014)
 - Back Wall**
Two-side Mirror Stainless Steel
Central Mirror Etched Stainless Steel (ZHY-013)
 - Car Door**
Mirror Stainless Steel
 - Lintel**
Mirror Stainless Steel
 - Floor**
Marble Floor (ZSC-002) (Can select other models)

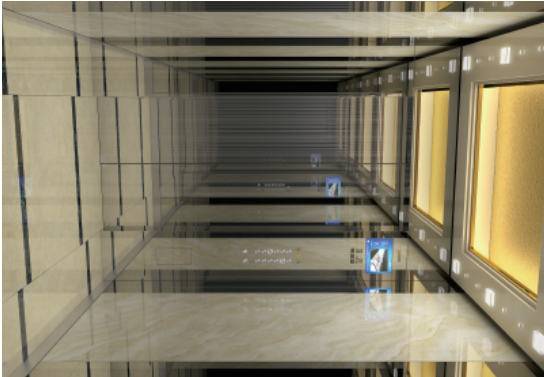




Modern Chinese




Zijing House / ZCD-021X LED

- Car Ceiling**
ZCL-GS16 (Color code: Y033)
- Operation Panel**
ZCB802-1710
(Headline Titanium-coated ZDT-001 Panel)
(Can select other models)
- Front Wall**
Headline Titanium-coated Stainless Steel (ZDT-001)
- Side Walls**
Two-side Headline Etched Titanium-coated Stainless Steel (ZHT-028+ZDT-001)
Central Laminated Steel Sheet (ZYVA-001)
- Back Wall**
Two-side Laminated Steel Sheet (ZYVA-001)
Central Mirror Etched Titanium-coated Stainless Steel (ZHT-027+ZDT-001)
- Car Door**
Headline Titanium-coated Stainless Steel (ZDT-001)
- Intel**
Headline Titanium-coated Stainless Steel (ZDT-001)
- Floor**
Marble Floor (ZSC-011) (Can select other models)

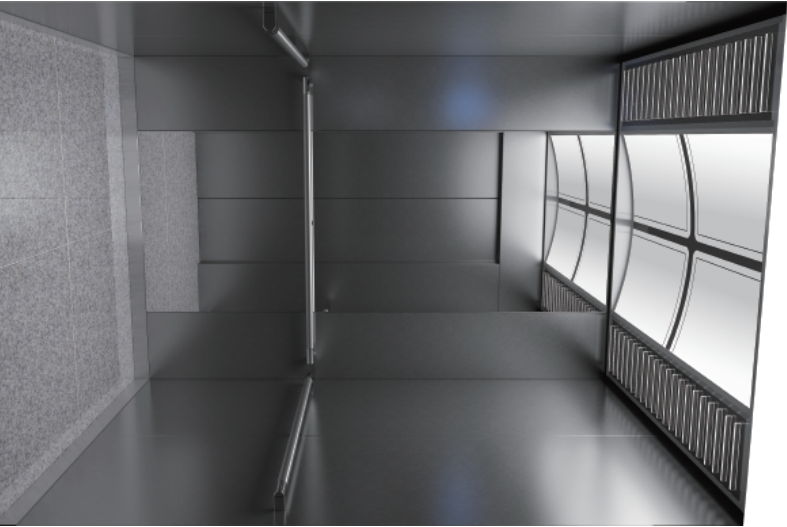


Modern Simple



Juying Cabinet / ZCD-023G LED

- Car Ceiling**
ZCL-DS13
- Operation Panel**
ZCBA23-1310
(Titanium-coated ZDT-005 Panel with Irregularly-polished Lines)
(Can select other models)
- Front Wall**
Titanium-coated Stainless Steel with Irregularly-polished Lines (ZDT-005)
- Side Walls**
Titanium-coated Stainless Steel with Irregularly-polished Lines (ZDT-005)
- Back Wall**
Two-side Titanium-coated Stainless Steel with Irregularly-polished Lines (ZDT-009)
Central Mirror Stainless Steel
- Car Door**
Titanium-coated Stainless Steel with Irregularly-polished Lines (ZDT-005)
- Intel**
Titanium-coated Stainless Steel with Irregularly-polished Lines (ZDT-005)
- Handcalls**
Three-side Stainless Steel Round Handcalls (ZYHRH01)
(Can provide none or select other models)
- Floor**
Marble Floor (ZSC-015) (Can select other models)


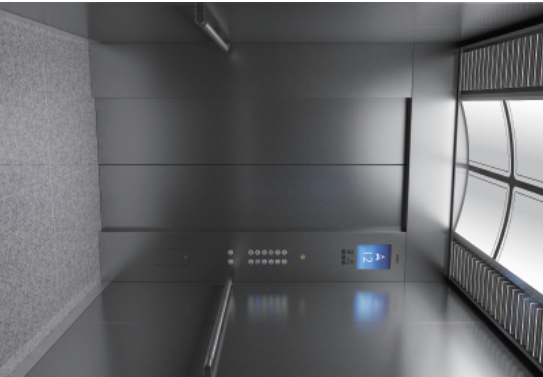


Note: if you have any other requirements for car configuration, please contact the Business Department of our company.




Shuyue Cabinet / ZCD-024G LED

- Car Ceiling**
ZCL-GN04
- Operation Panel**
ZCBA11-1310
(Hairline Panel) (Can select other models)
- Front Wall**
Hairline Stainless Steel
- Side Walls**
Metallic Paint (ZLS-011G)
- Back Wall**
Two-side Mirror Stainless Steel
- Central Mirror Wiredrawing Stainless Steel with Irregularly-polished Lines (ZLF-001)**
- Car Door**
Hairline Stainless Steel
- Lintel**
Hairline Stainless Steel
- Handrails**
Two-side Stainless Steel Round Handrail (ZYH-RH01)
(Can provide none or select other models)
- Floor**
Marble Floor (ZSC-001) (Can select other models)

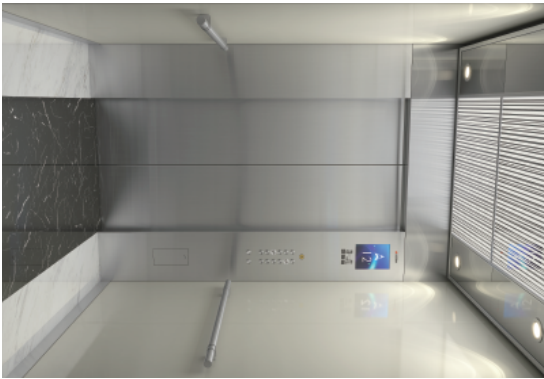

Qinfang House / ZCD-017X LED

- Car Ceiling**
ZCL-GN05
- Operation Panel**
ZCBA12-C510
(Hairline Panel) (Can select other models)
- Front Wall**
Hairline Stainless Steel
- Side Walls**
Laminated Steel (ZYH-015)
- Back Wall**
Two-side Mirror Stainless Steel
- Central Mirror Wiredrawing Stainless Steel (ZLS-001)**
- Car Door**
Hairline Stainless Steel
- Lintel**
Hairline Stainless Steel
- Floor**
Parquet Floor (ZPH-026) (Can select other models)




Natural and Elegant

Note: If you have any other requirements for car configuration, please contact the Business Department of our company.




Modern Simple




Jintai Cabinet / ZCD-025G LED

- Car Ceiling**
ZCL-GS06
- Operation Panel**
ZCBA114-CS10
(Hotline Panel) (Can select other models)
- Wheel Chair Operation Panel**
ZCBA04-F10 (Mirror Panel)
- Front Wall**
Hotline Stainless Steel
- Side Walls and Back Wall**
Two-side Hotline Stainless Steel
Central Mirror Stainless Steel
- Car Door**
Hotline Stainless Steel
- Lintel**
Hotline Stainless Steel
- Handrails**
Three-side Stainless Steel Round Handrails (ZYH-RH02)
(Can provide none or select other models)
- Floor**
Parquet Floor (ZPH-014) (Can select other models)

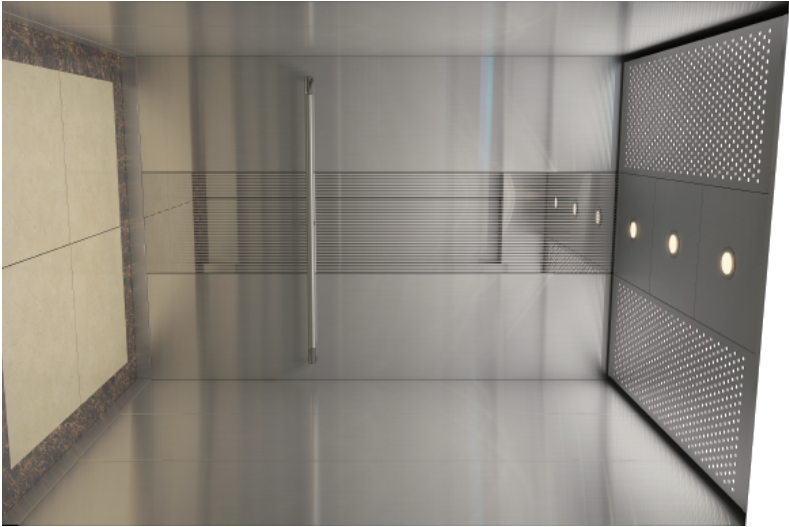

Modern Simple



Yishu Cabinet / ZCD-022G LED

- Car Ceiling**
ZCL-GN02
- Operation Panel**
ZCBA111-CS10
(Hotline Panel) (Can select other models)
- Front Wall**
Hotline Stainless Steel
- Side Walls**
Hotline Stainless Steel
- Back Wall**
Two-side Hotline Stainless Steel
Central Mirror Etched Stainless Steel (ZYH-O13)
- Car Door**
Hotline Stainless Steel
- Lintel**
Hotline Stainless Steel
- Handrails**
Front Stainless Steel Round Handrail (ZYH-RH02)
(Can provide none or select other models)
- Floor**
Parquet Floor (ZPH-028) (Can select other models)






Note: If you have any other requirements for car configuration, please contact the Business Department of our company.



Xingyu Court / ZCD-022T





- Car Ceiling**
ZCL-GN03
- Operation Panel**
ZCBA12-C210
- Front Wall**
Hairline Stainless Steel
- Side Walls**
Hairline Stainless Steel
- Back Wall**
Mirror-blasted Titanium-coated Stainless Steel (ZPS-003+ZDT-001)
- Car Door**
Hairline Stainless Steel
- Intel**
Hairline Stainless Steel
- Handrails**
Two-side Stainless Steel Round Handrail (ZTH-RH02)
(Can provide none or select other models)
- Floor**
Parquet Floor (ZPH-Q31) (Can select other models)

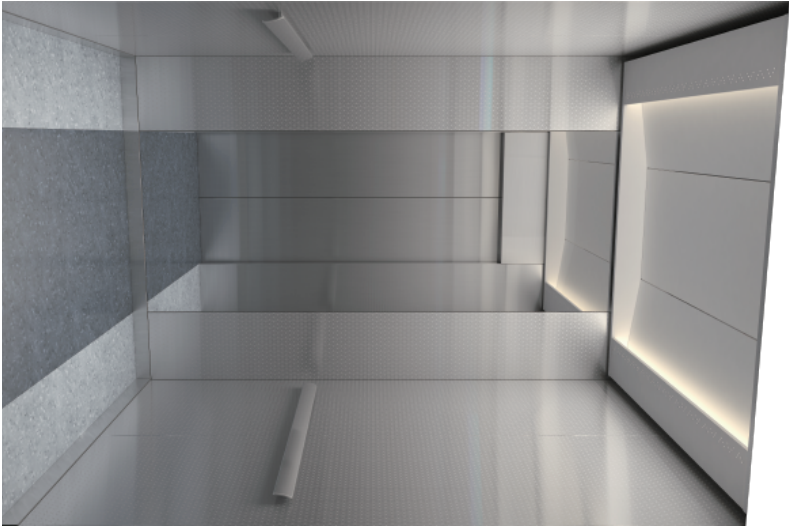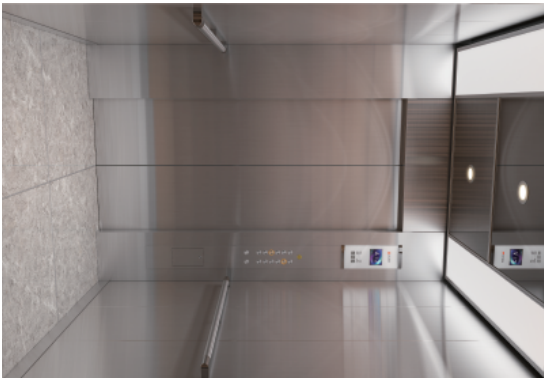

Yinlin Court / ZCD-023T



- Car Ceiling**
ZCL-SS06
- Operation Panel**
ZCBA11-C510
- Front Wall**
Hairline Etched Stainless Steel (ZHY-026)
- Side Walls**
Hairline Etched Stainless Steel (ZHY-026)
- Back Wall**
Two-side Hairline Etched Stainless Steel (ZHY-026)
- Central Mirror**
Central Mirror Stainless Steel
- Car Door**
Hairline Stainless Steel
- Intel**
Hairline Stainless Steel
- Handrails**
Two-side Stainless Steel Oblique Handrail (ZYH-SH01)
(Can provide none or select other models)
- Floor**
Parquet Floor (ZPH-027) (Can select other models)

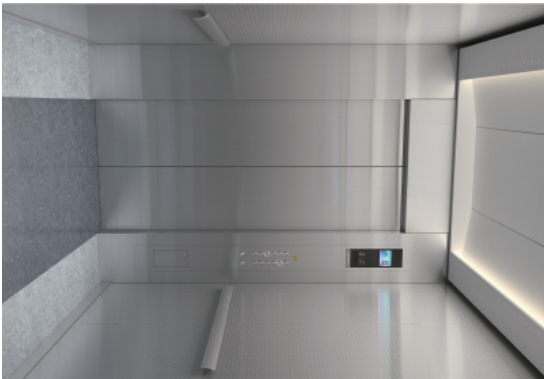

Modern Urban

Modern Luxury

Note: If you have any other requirements for car configuration, please contact the Business Department of our company.



Modern Simple



Jingyue Court / ZCD-020T LED

Car Ceiling

ZCL-SS08 (Color code: Y033)

Operation Panel

ZCBA11-C510 (Hairline Panel) (Can select other models)

Wheel Chair Operation Panel

ZCBA04-F110 (Hairline Panel) (Can select other models)

Front Well

Hairline Stainless Steel

Side Walls

Hairline Stainless Steel

Back Wall

Two-side Hairline Stainless Steel

Central Mirror Stainless Steel

Car Door

Hairline Stainless Steel

Lintel

Hairline Stainless Steel


Handrails

Three-side Stainless Steel Round Handrails (ZYH-RH02)

(Can provide none or select other models)

Floor

Parquet Floor (ZPH-Q23) (Can select other models)

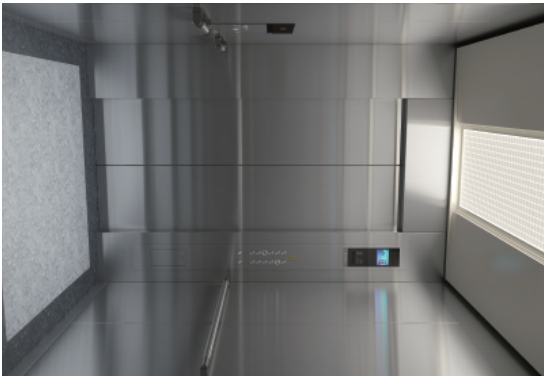

Pinxuan Court / ZCD-019T LED

Car Ceiling

ZCL-SS03 (Color code: Y033)

Operation Panel

ZCBA09-C110 (Hairline Stainless Steel) (Can select other models)

Front Wall

Hairline Stainless Steel

Side Walls

Painted Steel Plate (Y023)

Back Wall

Two-side Painted Steel Sheet (Y023), Central Mirror Stainless Steel

Car Door

Hairline Stainless Steel

Lintel

Hairline Stainless Steel

Handrails

Front Stainless Steel Round Handrail (ZYH-RH02)

(Can provide none or select other models)

Floor

PVC Stone Floor (ZPR-Q12) (Can select other models)



Haoyue Court / ZCD-021T LED

Car Ceiling

ZCL-SS07 (Color code: Y033)

Operation Panel

ZCBA11-C510 (Hairline Stainless Steel) (Can select other models)

Car Walls

Hairline Stainless Steel

Car Door

Hairline Stainless Steel

Lintel

Hairline Stainless Steel

Mirror

Half-height Mirror


Handrails

Two-side Stainless Steel Flat Handrail (ZYH-FH10)


(Can provide none or select other models)

Floor

PVC Stone Floor (ZPR-Q01) (Can select other models)

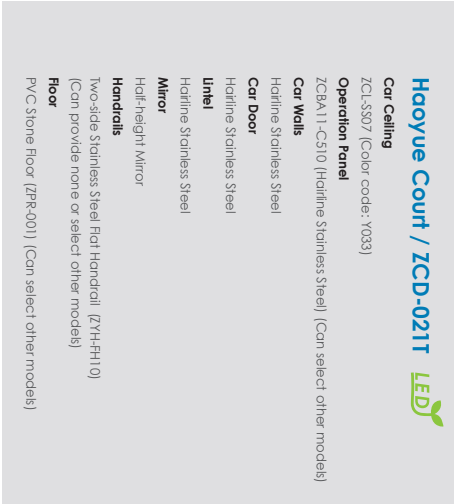


ZCL-DS12 (Optional)

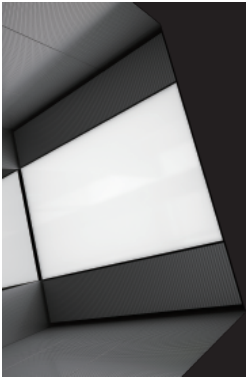


Lighting: central direct lighting;
Material: central imported high-grade white acrylic central soft film;
Two-side milking etched black-painted titanium stainless steel;
Thickness: 200mm

ZCL-GS16 (Optional)

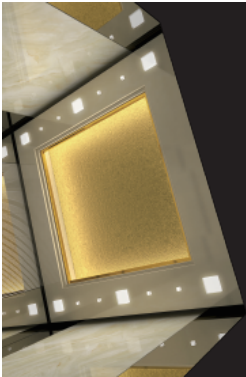


Lighting: ambient floodlight lighting; two-side auxiliary lighting;
Material: central floodlight soft film, ambient painted steel sheet;
Colors are in need, select in accordance with the color panel palette of Shanghai Mitsubishi;
Two-side acrylic crystal hanging pieces;
Thickness: 200mm

ZCL-GN04 (Optional)

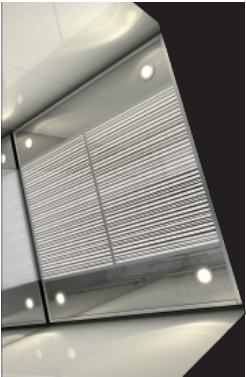

Lighting: central direct lighting; two-side down lamp lighting;
Material: central imported high-grade white acrylic lighting board;
Aluminum alloy frame;
Thickness: 200mm

ZCL-GS06 (Optional)

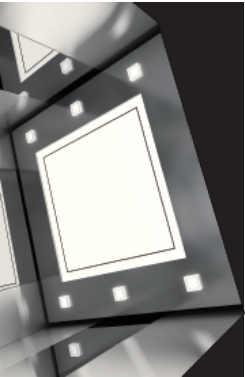


Lighting: central direct lighting; two-side auxiliary lighting;
Material: central imported high-grade white acrylic lighting board;
Ambient metallic painting steel sheet; two-side acrylic crystal hanging pieces;
Thickness: 200mm

ZCL-GS08 (Optional)




Lighting: ambient floodlight lighting; central down light direct lighting;
Material: central mirror stainless steel, ambient painted steel plate
(color code: Y033);
Thickness: 200mm

ZCL-DS13 (Optional)

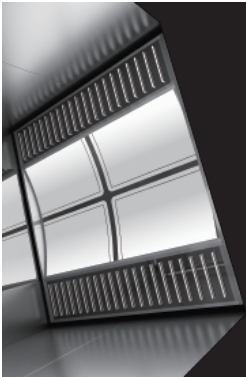


Lighting: central direct lighting; two-side auxiliary lighting;
Material: central mirror stainless steel, ambient acrylic lighting boards;
Two-side acrylic crystal hanging pieces; stainless steel frame;
Thickness: 200mm

ZCL-GN05 (Optional)

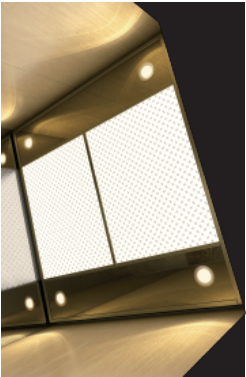


Lighting: central direct lighting; two-side down lamp lighting;
Material: central mirror stainless steel, ambient acrylic lighting boards;
Two-side golden mirror acrylic panel; aluminum alloy frame;
Thickness: 200mm

ZCL-GN02 (Optional)

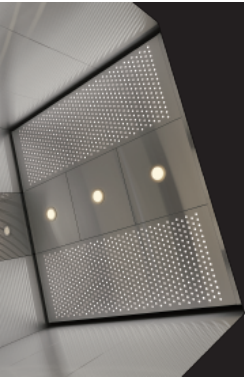

Lighting: central down lamp lighting; two-side lighting board lighting;
Material: mirror stainless steel ceiling panels;
Thickness: 200mm

ZCL-GN03 (Optional)

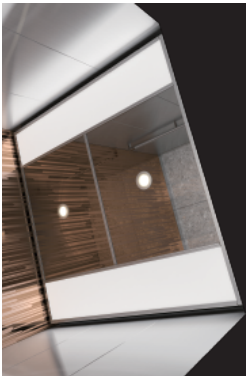

Lighting: central down lamp lighting; two-side lighting board lighting;
Material: central mirror acrylic lighting board; two-side milk white acrylic lighting boards;
Aluminum alloy frame;
Thickness: 200mm

ZCL-SS08 (Optional)




Lighting: central direct lighting;
Material: central milk white ambient lighting board; two-side coating steel sheet (color code: Y033);
If other colors are in need, select color in accordance with Shanghai color palette;
Thickness: 200mm

ZCL-SS07 (Optional)




Lighting: down light direct lighting;
Material: central mirror stainless steel lighting board (color code: Y033);
If other colors are in need, select color in accordance with Shanghai color palette;
Thickness: 100mm

ZCL-SS06 (Optional)

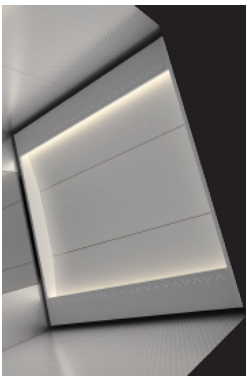

Lighting: two-side warm floodlight lighting;
Material: painted steel sheet ceiling plate (color code: Y033);
Thickness: 200mm

ZCL-SN03 (Optional)

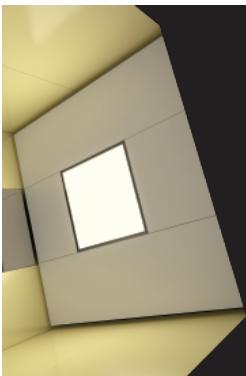

Lighting: central direct lighting;
Material: central milk white light guide plate, peripheral coating steel sheet ceiling
(color code: Y033);
If other colors are in need, select color in accordance with Shanghai color palette;
Thickness: 100mm

ZCL-CN01 (Empty Car Roof)


By others: (ceiling thickness: 100mm).



ZCL-CN08 (Empty Car Roof)

By others: (ceiling thickness: 200mm).

Note:
All car roofs adopt LED lighting.
The ventilation outlet of car roof is arranged at the back of the two sides.
Car roof may be compatible with deep cuts and wide cuts.
Safety windows are optional for car roofs. Consult sales persons for details.

Front Wall Half Height Operation Panel






	Amber LED, classic and durable.	
	5.7" Color segmented LCD, fine and vivid.	
	5.7" TFT LCD, fine and vivid.	
	The buttons are interchangeable. The figure shown is A09 button.	
	The buttons are interchangeable. The figure shown is A11 button.	
	The buttons are interchangeable. The figure shown is A23 button.	


Note:

- *1 Configurable when front wall width ≥250mm.
- *2 The symbol  represents the button model, please select the button model from Page 28. It is recommended to select A01~A06 buttons when the parking floors of front wall half-height operation panel exceed 28 floors.
- *3 Please refer to Page 31 for LCD.

Human-machine Component Design

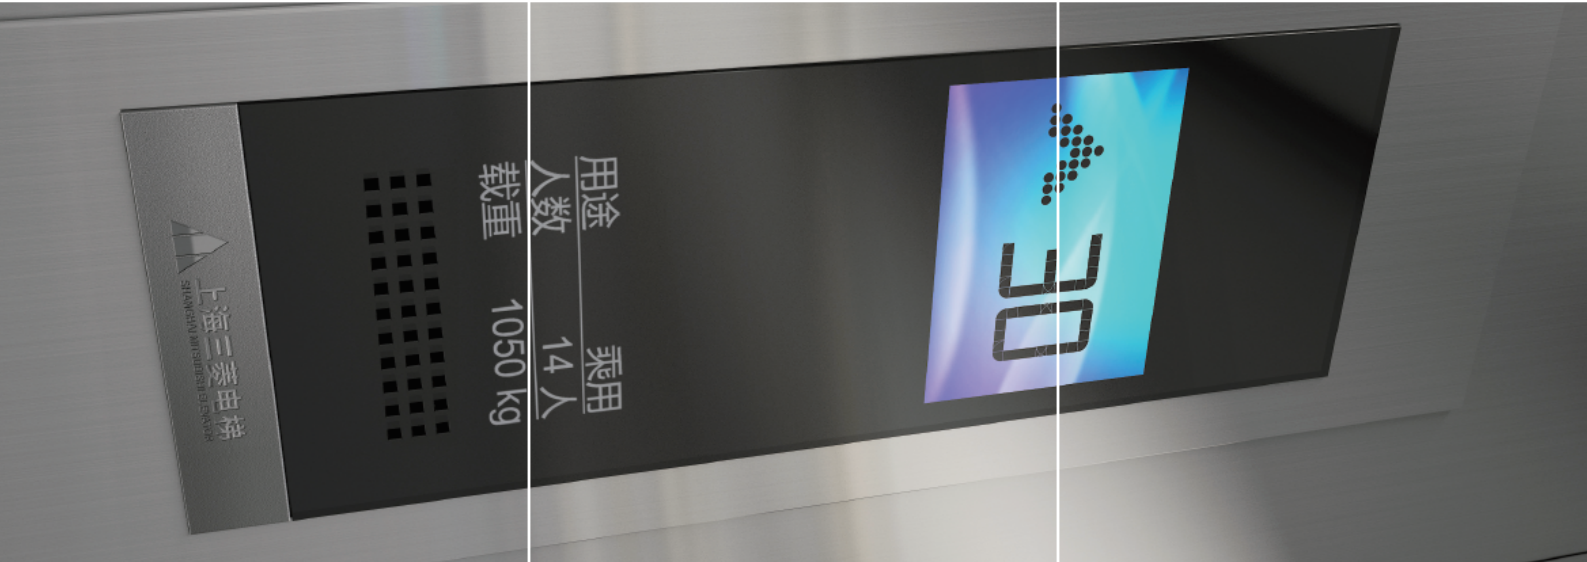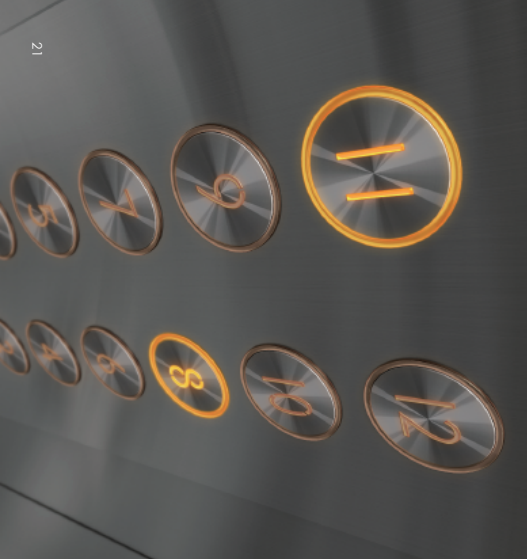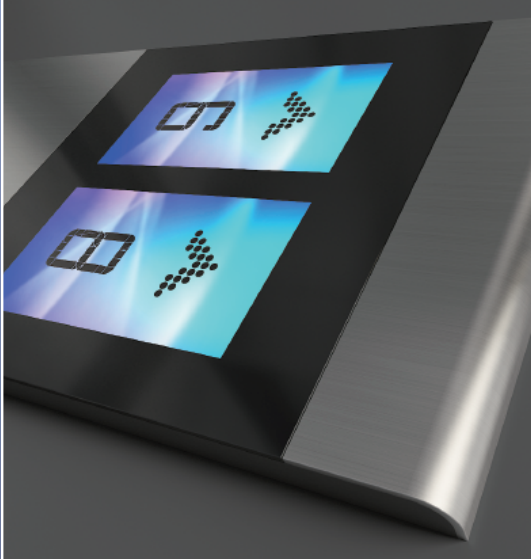

Side Wall Full-height Operation Panel





	Amber LED, classic and durable.	Stainless Steel Panel	The buttons are exchangeable. The figure shown is A09 button.
	5.7" Color segmented LCD, fine and vivid.	Stainless Steel Panel	The buttons are exchangeable. The figure shown is A11 button.
	5.7" TFT LCD, fine and vivid.	Stainless Steel Panel	The buttons are exchangeable. The figure shown is A23 button.


Side Wall Full-height Operation Panel
Comply with GB/ 124477 Standard

	Amber LED, classic and durable.	Stainless Steel Panel	The buttons are exchangeable. The figure shown is A04 button.*1
	5.7" Color segmented LCD, fine and vivid.	Stainless Steel Panel	The buttons are exchangeable. The figure shown is A04 button.*1
	5.7" TFT LCD, fine and vivid.	Stainless Steel Panel	The buttons are exchangeable. The figure shown is A04 button.*1

Wheel Chair
Operation Panel



*3 ZCB-F10 (Primary)
ZCB-F160 (Auxiliary)



ZCB-F130 (Primary)
ZCB-F180 (Auxiliary)
Comply with GB/ 124477 Standard

Note:


- *1 Configurable when front wall width <250mm.
- *2 The symbol ■ represents the button model, please select button from Page 28.
- *3 Please refer to Page 31 for LCD.

Note:

- *1 Signal ■ represents the button model. The optional buttons of the operation panel in this page are A04, A05, A06 (complying with GB124477 standard). See details in Page 28.
- *2 Please refer to Page 31 for LCD.
- *3 The difference of the appearance of ZCB-F130 and ZCB-F110: the button of the first floor is protruding and the frames of the two sides are black.

Pictures of computer painting may slightly differ from the actual.

Front-wall Integrated Operation Panel



If integrated operation panel is selected, the thickness of the side wall decoration layer decorated secondarily by the client should be less than 15mm.



ZCB-1310 (Primary)
ZCB-1360 (Auxiliary)
(Configurable when front wall>300)
8.4" TFT LCD
Stainless Steel Panel
The figure shown is A11 button.

ZCB-1710 (Primary)
ZCB-1760 (Auxiliary)
(Configurable when front wall>350)
10.4" Multimedia LCD
Stainless Steel Panel
The figure shown is A23 button.

ZCB-1410 (Primary)
ZCB-1460 (Auxiliary)
(Configurable when front wall>400)
12.1" Multimedia LCD
Stainless Steel Panel
The figure shown is B02 button.

ZCB-1810 (Primary)
ZCB-1860 (Auxiliary)
(Configurable when front wall>450)
15.0" Multimedia LCD
Stainless Steel Panel
The figure shown is D01 button.

Wall-mounted Landing Call

LED Dot Matrix Display



ZPI-G110
Stainless Steel Panel
Without Bottom Box

ZPI-G120
Stainless Steel Panel
Without Bottom Box

4.3" Color Segmented LCD



ZPI-G810
Stainless Steel Panel
Without Bottom Box



ZPI-G820
Stainless Steel Panel
Without Bottom Box

4.3" TFT LCD



ZPI-GA10
Stainless Steel Panel
Without Bottom Box



ZPI-GA20
Stainless Steel Panel
Without Bottom Box

Note:

*1 The symbol ■ represents the button model, please select button from Page 28.

*2 Please refer to Page 31 for LCD.

Wall-mounted Landing Call (Without Bottom Box)

Barrier-free design response, complying with GB/T24477 standard.

		
ZHB●-G010 (Single Bevel) *1	ZHB●-H030 (Single Bevel) *2*3 ZHB●-H040 (Parallel Connection) *2*4	ZHB●-H041 (Parallel Connection)*2*5

Matching Diagram (Respond to the requirements of the handicapped.)

Single elevator and parallel connection calls should be corresponding one by one.



Note:

- *1 The symbol ● represents the button model; please select button from Page 28.
- *2 The symbol ● represents the button model. The optional buttons are A14, A15, A16 (complying with GB/T24477 standard). See details in Page 28.
- *3 Required to be used together with ZHB●-G010 or ZHB●-GX10
- *4 Required to be used together with ZHB●-G020.
- *5 Required to be used together with ZHB●-G020.
- *6 If bottom box is needed, contact the sales person for non-standard installation of bottom box. The appearance of the landing indicators with or without bottom box will be consistent.

Basic Buttons

	
A11 White Light Flat Words	A01 White Light Flat Words
A12 Orange Light Flat Words	A02 Orange Light Flat Words
A13 Blue Light Flat Words	A03 Blue Light Flat Words
A14 White Light Protuded Words with Braille	A04 White Light Protuded Words with Braille
A15 Orange Light Protuded Words with Braille	A05 Orange Light Protuded Words with Braille
A16 Blue Light Protuded Words with Braille	A06 Blue Light Protuded Words with Braille

Illustration of the Button Samples

					
White Light Flat Words	Orange Light Flat Words	Blue Light Flat Words	White Light Protuded Words with Braille	Orange Light Protuded Words with Braille	Blue Light Protuded Words with Braille

Optional Button Styles

			
A09 Diameter 31mm Machinery Fine Motion Flat Words Orange Light Round Outline Stainless Steel Surface	B02 Diameter 35mm Machinery Fine Motion Orange Light Resin Button Cap Stainless Steel Button Ring	A23 Diameter 35mm Touch Sensitive Standby White Light up the Blue Light Flat Words CD Line Stainless Steel Surface	D01 Square 35mm Machinery Fine Motion White Light Resin Button Cap


Note:

- * It is recommended to select A11~A16 buttons for hall call buttons when the car operation panel selects A01~A06 buttons.

Hall Door and Jamb

E-102

Narrow Door Jamb
Applicable for wide cor., deep cor.

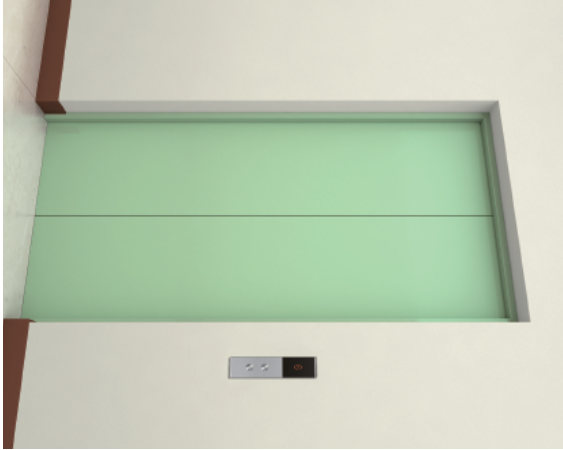

Landing Display Coll: ZPMAP-G110
Landing Door Material: Painted Steel Sheet
Jamb Material: Painted Steel Sheet

E-302


Bevel (10°) Large Door Jamb
Applicable for wide cor., deep cor.



Landing Display Coll: ZPA-11-GS10
Landing Door Material: Hairline Stainless Steel
Jamb Material: Hairline Stainless Steel

E-312

Curtain Plate Type Bevel (10°) Large Door Jamb
Only applicable for wide cor.

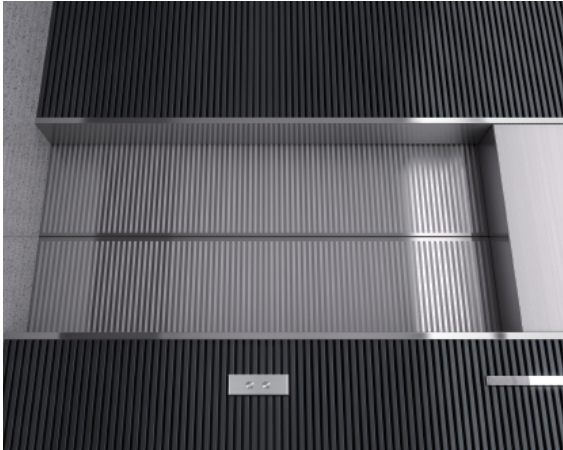

Landing Direction Light: ZHLV-H010
Landing Coll: ZHBA11-GS10
Landing Door Material: Hairline Etched Stainless Steel (ZHR-006)
Jamb Material: Hairline Stainless Steel

E-322

Slant Curtain Plate Bevel (10°) Large Door Jamb
Only applicable for wide cor.



Landing LCD: ZPH-N301 (Elegant Brown)
Landing Coll: ZHBA11-GS10
Landing Door Material: Mirror Etched Double-color Titanium-coated Stainless Steel (ZPF-001)
Jamb Material: Mirror Titanium-coated Stainless Steel (ZDT-002)

Landing Direction Light

Should be used together with the landing call button components referred to Page 27.



* The above landing direction lights are all LED lighting, which are energy saving and with prolonged service life.
Each model of direction lights provides white light, warm white light and blue light at your choice.

Diagram of the lighting color of each landing direction light



Landing Display

Should be used together with the landing call button components referred to Page 27.



HID-A10

Embedded Large-scale Landing Display without Panel

Applicable when the Jamb model is E-312.



ZPH-F301 *

Wall-mounted Landing Display

Transparent acrylic frame

Matt chrome-coated panel

8.4" TFT LCD



ZPH-N301 *

Embedded Landing Display without Panel

HD 8.4" TFT LCD

Applicable when the Jamb model is E-322.

Embedded Large-scale Landing Display
Applicable when the Jamb model is non-E-312 and non-E322.

HID-A20



* Please refer to Page 31 for LCD.

Color Segmented LCD

Patented LCD technology: Innovative interface design, full view, high contrast ratio.

4.3" LCD (for Landing Display)



5.7" LCD (for Operation Panel)



FTI LCD

The new generation of LCD adopts the state-of-the-art hardware driving circuits and finer LCD screens. Adopt also the brand new interface design, endowing common LCD with new vitality, livelier, more vivid and cooler. The typical interface designs of the four styles may comply with the demands of various car decorations.

Horizontal elevator operating indication.
(for operation panel 5.7" for landing display 8.4")



Elegant Purple
Standard



Elegant Brown
Hotel



Elegant Green
Residence



Gentle Blue
Business Building

Vertical elevator operating indication.
(for landing display 4.3" for operation panel 8.4")



Elegant Purple
Standard



Elegant Green
Residence



Elegant Brown
Hotel




Gentle Blue
Business Building

* It is required to designate an interface when ordering the elevator.

Multimedia Information Display System (EMIDS)

Adopt stronger processing system and finer LCD. Develop several models of brand new designed interfaces on the basis of hardware update. Display multimedia information while realize elevator floor indication. Provide advertisement while bring more joyful elevator riding experience in the narrow elevator space.


10.4" , 12.1" , 15.0" , real color 1024*768



Classic A



Classic B



Full Screen



Floor Forecast A



Floor Forecast B

* The 5 interfaces are all included in the equipment. The interface may be changed on the spot by host computer.

Handrail Type



ZYH-SH01

Stainless Steel leaning Handrail




ZYH-FH10

Stainless Steel Flat Handrail



ZYH-RH01

Stainless Steel Round Handrail



ZYH-RH02

Stainless Steel Round Handrail

Floor Material

In order to correspond to different decoration demands, the 8 types of patterns may be corresponded by parquet mobile floor or parquet PVC floor as well as single color PVC stone floor. The color code may be selected in accordance with the color sample of Shanghai Mitsubishi.

Parquet Marble Floor



ZSC-001



ZSC-002




ZSC-011



ZSC-012



ZSC-013



ZSC-014



ZSC-015



ZSC-016

Parquet PVC Floor



ZPH-027



ZPH-030




ZPH-028



ZPH-023



ZPH-026



ZPH-029



ZPH-031




ZPH-014

Project	Specifications	Notes
Car wall and Car Door	Printed steel sheet, notfire stainless steel, notfire etched stainless steel, notfire titanium-coated stainless steel, mirror stainless steel, mirror etched titanium-coated stainless steel, mirror polished lines, titanium-coated stainless steel, with irregularly-polished lines, sand-bottom stainless steel, sand-bottom titanium-coated stainless steel, metallic paralling steel sheet, laminated steel sheet, firm-mounting steel sheet	Applicable when the car decoration plan is self-selected.
Mirror	Stainless steel (height: full height)	When door opening is ID1-G.
Handrail type	Stainless steel, two side walls, three sides wall	When the door opening type is ID1-G.
Floor	PVC Stone Floor, Parquet floor	When the door opening type is ID1-G.
Landing floor	Printed steel sheet, notfire stainless steel, notfire etched stainless steel, notfire titanium-coated stainless steel, mirror stainless steel, mirror etched titanium-coated stainless steel, mirror polished lines, titanium-coated stainless steel, with irregularly-polished lines, sand-bottom stainless steel, sand-bottom titanium-coated stainless steel, metallic paralling steel sheet, Design-B	When the door opening type is ID1-G.
Joint	Printed steel sheet, metallic printed steel sheet, notfire stainless steel, notfire titanium-coated stainless steel, mirror stainless steel, with irregularly-polished lines, sand-bottom stainless steel, sand-bottom titanium-coated stainless steel, metallic paralling steel sheet, laminated steel sheet, firm-mounting steel sheet	When the door opening type is ID1-G.
	Printed steel, notfire stainless steel	Applicable for E312 and E322 when they are center opening doors.
	Printed steel, notfire stainless steel	Applicable for E312 and E322 when they are side opening doors.

Feature	Description	Code	IC-BAC	PC-SM21	B-AE-FC-21
■ Automatic and Security Features	Automatic Landing with Predefined Mode	AAU	○	○	○
	Artificial Timer	AST	○	○	○
	Energy Feedback	EBFB-1	○	○	○
	Hard Operation	HAHD	○	○	○
	Local Warning Start	LWS	○	○	○
	Power on Retelling	ROL	○	○	○
	Soft Landing	SL	○	○	○
	Stop Open	SO	○	○	○
	Unintended Car Movement Protection	UCMP	○	○	○
	■ Door Opening Features				
■ Emergency Operation Features	Light Curtain Protection	AMS-2	○	○	○
	Door Close Button Response Light	DCR	○	○	○
	Double Door Operation	DDOP	○	○	○
	Extended Door-open Button	DKOB	○	○	○
	Door Load Detect	DLD	○	○	○
	No Door Open Feature	DOING	○	○	○
	Automatic Door-open Time Adjustment	DOT	○	○	○
	Expelling of Door Close	EDC	○	○	○
	Multi-beam Safety Edge	MSB-2	○	○	○
	Door Nudging Feature - with Barrier	NDG-3	○	○	○
	Door Nudging Feature without Barrier	NDNG	○	○	○
	Repeated Door-Close	RDC	○	○	○
	Rescue with Hall Button	ROAB	○	○	○
	Safety Edge	SDE-2	○	○	○
	Emergency Car Lighting	ECL	○	○	○
	Emergency Car Lighting Extinction	EEES	○	○	○
	Power Return Emergency Landing Device	EDD-4	○	○	○
	Alarm Bell	EBB	○	○	○
	The Emergency Return	FER-5	○	○	○
■ Group Control Features	Operating to Emergency Power Source - Safe Automatic Monitoring System	OPES-VA	○	○	○
	Monitoring System	SMOCS-4	○	○	○
	Emergency Operation Features				
	Emergency Car Lighting	ECL	○	○	○
	Emergency Car Lighting Extinction	EEES	○	○	○
	Power Return Emergency Landing Device	EDD-4	○	○	○
	Alarm Bell	EBB	○	○	○
	The Emergency Return	FER-5	○	○	○
	Operating to Emergency Power Source - Safe Automatic Monitoring System	OPES-VA	○	○	○
	Monitoring System	SMOCS-4	○	○	○
■ Operational and Service Features	Emergency Operation Features				
	Emergency Car Lighting	ECL	○	○	○
	Emergency Car Lighting Extinction	EEES	○	○	○
	Power Return Emergency Landing Device	EDD-4	○	○	○
	Alarm Bell	EBB	○	○	○
	The Emergency Return	FER-5	○	○	○
	Operating to Emergency Power Source - Safe Automatic Monitoring System	OPES-VA	○	○	○
	Monitoring System	SMOCS-4	○	○	○
	Emergency Operation Features				
	Emergency Car Lighting	ECL	○	○	○
■ Operational and Service Features	Emergency Operation Features				
	Emergency Car Lighting	ECL	○	○	○
	Emergency Car Lighting Extinction	EEES	○	○	○
	Power Return Emergency Landing Device	EDD-4	○	○	○
	Alarm Bell	EBB	○	○	○
	The Emergency Return	FER-5	○	○	○
	Operating to Emergency Power Source - Safe Automatic Monitoring System	OPES-VA	○	○	○
	Monitoring System	SMOCS-4	○	○	○
	Emergency Operation Features				
	Emergency Car Lighting	ECL	○	○	○

Feature	Description	Code	IC-BAC	PC-SM21	B-AE-FC-21
■ Operational and Service Features	Secret Car Service (Car button type)	SCS-A-12	○	○	○
	Secret Car Service (IC Card type)	SCS-C-13	○	○	○
	■ Information and Display Features				
	Voice Announcement Device	AAAS-502-14	○	○	○
	Voice Announcement Device	AAAS-502-14	○	○	○
	Voice Announcement Device	AAAS-502-14	○	○	○
	Voice Announcement Device	AAAS-502-14	○	○	○
	Voice Announcement Device	AAAS-502-14	○	○	○
	Voice Announcement Device	AAAS-502-14	○	○	○
	Voice Announcement Device	AAAS-502-14	○	○	○
■ Information and Display Features	Voice Announcement Device	AAAS-502-14	○	○	○
	Voice Announcement Device	AAAS-502-14	○	○	○
	Voice Announcement Device	AAAS-502-14	○	○	○
	Voice Announcement Device	AAAS-502-14	○	○	○
	Voice Announcement Device	AAAS-502-14	○	○	○
	Voice Announcement Device	AAAS-502-14	○	○	○
	Voice Announcement Device	AAAS-502-14	○	○	○
	Voice Announcement Device	AAAS-502-14	○	○	○
	Voice Announcement Device	AAAS-502-14	○	○	○
	Voice Announcement Device	AAAS-502-14	○	○	○

Remarks:	1
Standard feature when load capacity is above 1800kg.	2
SDE, MSB or AMS must be selected and can only select one function.	3
Optional when AAN is selected.	4
Optional when the interval of the adjacent floor is no more than 10m.	5
It should be considered that the elevator car return from the top floor to the pre-circulation floor within 60 seconds.	6
Customer shall provide normal open dry contact signal of power supply to control panel in machine room.	7
Non-standard. Applicable when the operation mode is RS-21 and the door open type is RS-20G.	8
When the number of top is >4, and the SCS-C is not configured to be applied.	9
SCS-C is not configured to be applied.	10
Non-standard. 2 or less than 2 can be selected.	11
RCS or RET can be selected, but one feature of most.	12
Not applicable to ZDGS.	13
Non-standard	14
Either AAN-S21, AAN-S22 or AAN-S23 can be selected.	15
2 or less than 2 of the functions of AULT, BPL and REEL can be selected.	16
The output signals are going up, going down comprehensive trouble, landing encoding signal, the output terminals are needed in the control cabinet of the machine room.	17
Output signal can be dry contacts or RS485 serial communication form.	18
Standard feature when FER is configured, output in the control panel.	19
The cable from machine room to monitoring room and its installation should be handled by clients.	20
Either ITVA, ITV-D or ITV-S can be selected by one feature of most.	
Optional when DEFS-A.	
○ standard ○ Optional	

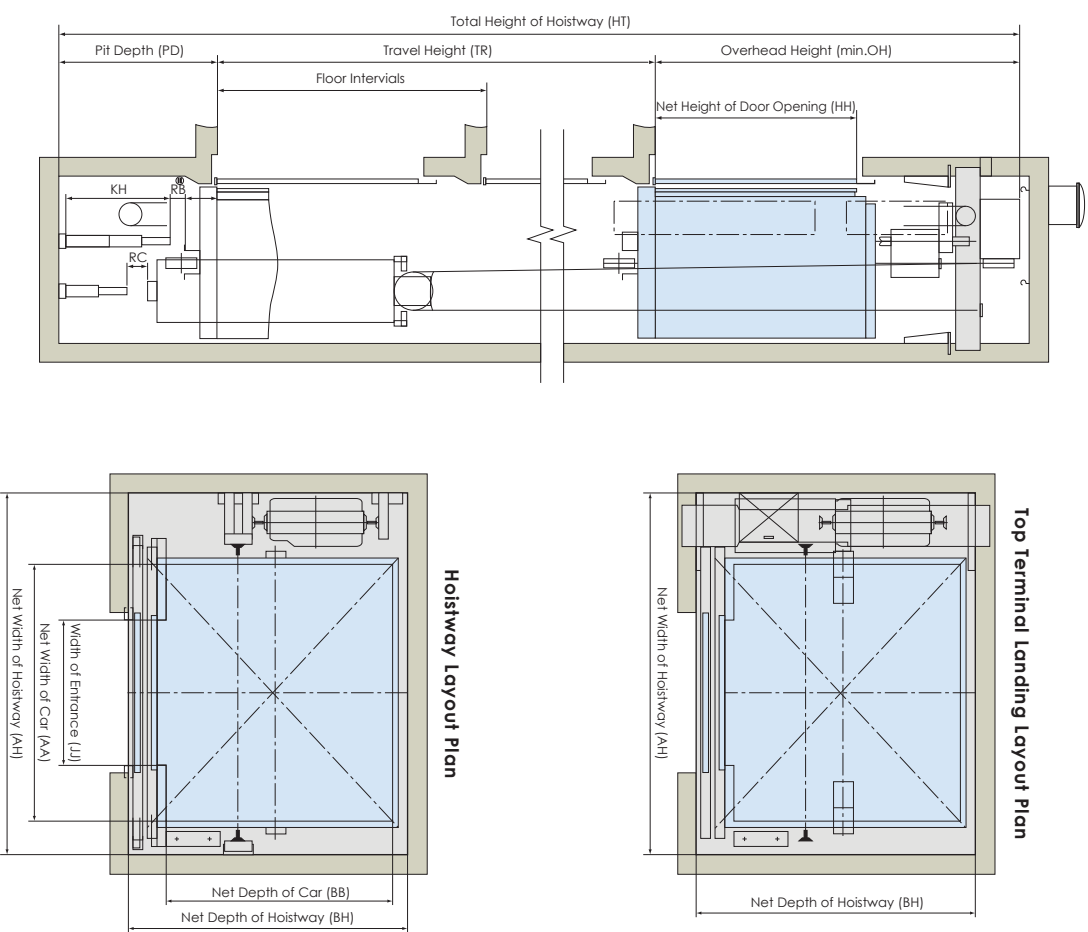

Item	P-04	P-06	P-07	P-08	P-10	P-1W	P-1D	P-1W	P-1D	P-21W	P-21D	P-24W	P-24D	P-26	P-30	P-33	Remark
Capacity (kg)	320	450	550	650	800	1050	1050	1275	1275	1600	1600	1800	1800	2000	2250	2500	
Inner Width of Car AA (mm)	650	1000	1100	1100	1350	1600	1100	2000	1200	2100	1400	1800	1500	2000	2100	2100	
Inner Depth of Car BB (mm)	1100	1200	1200	1400	1400	2100	1400	2300	1600	2400	2100	2500	2100	2100	2100	2300	
Door Open Width JJ (mm)	800	800	800	800	900	900	1100	1000	1100	1100	1200	1200	1200	1200	1200	1200	
Door Open Height HH (mm)	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	2100	
Overhead Height OH (mm)	≥3800	≥3800	≥3800	≥3800	≥3800	≥3800	≥3800	≥3800	≥3800	≥4150	≥4150	≥4250	≥4250	≥4250	≥4250	≥4250	*1
	≥3700	≥3700	≥3700	≥3700	≥3700	≥3700	≥3700	≥3700	≥3700								*2
				≥3850	≥3850	≥3850	≥3850	≥3850									*3
				≥3900	≥3900	≥3900	≥3900	≥3900									*4
	≥3900	≥3900	≥3900	≥3900													*5
	≥3800	≥3800	≥3800	≥3800	≥3800	≥3800	≥3800	≥3800	≥4150	≥4150	≥4150	≥4250	≥4250	≥4250	≥4250	≥4250	*6
				≥3950	≥3950	≥3950	≥3950										*7
	≥4000	≥4000	≥4000	≥4000	≥4000	≥4000	≥4000	≥4000	≥4000	≥4000	≥4000	≥4500	≥4500	≥4500	≥4500	≥4500	*8
	≥3900	≥3900	≥3900	≥3900	≥3900	≥3900	≥3900	≥3900									*9
				≥4050	≥4050	≥4050	≥4050	≥4050									*10
				≥4100	≥4100	≥4100	≥4100	≥4100									*11
	≥1350	≥1350	≥1350	≥1350													*12
Pit Depth PD (mm)	≥1350	≥1350	≥1350	≥1350	≥1300	≥1300	≥1610	≥1610	≥1610	≥1670	≥1670	≥1670	≥1670	≥1670	≥1670	≥1670	*13
	≥1300	≥1300	≥1300	≥1300	≥1400	≥1400	≥1400										*14
				≥1450	≥1450	≥1450	≥1450	≥1750	≥1750	≥1750	≥1810	≥1810	≥1810	≥1810	≥1810	≥1810	*15
				≥1955	≥2230	≥1960	≥2850	≥2300	≥2950	≥2300	≥2850	≥2700	≥2950	≥3050	≥3050	≥3050	*16
Inner Width of Hoisway AH (mm)	≥1500	≥1810	≥1910	≥1860	≥1955	≥2230	≥1960	≥2850	≥2300	≥2950	≥2300	≥2850	≥2700	≥2950	≥3050	≥3050	
Inner Depth of Hoisway BH (mm)	≥1480	≥1520	≥1520	≥1720	≥1720	≥2420	≥1830	≥2690	≥2030	≥2790	≥2475	≥2875	≥2475	≥2475	≥2475	≥2675	

- Remark
1. When car clear height is 2000 (See instruction 9) and rated speed is 0.63m/s

2. When car clear height is 2000 (See instruction 9) and rated speed is 1m/s

3. When car clear height is 2000 (See instruction 9) and rated speed is 1.6m/s

4. When car clear height is 2000 (See instruction 9) and rated speed is 1.75m/s

5. When car clear height is 2000 (See instruction 9) and rated speed is 0.63m/s

6. When car clear height is 2000(See instruction 9) and rated speed is 1m/s

7. When car clear height is 2000 (See instruction 9) and rated speed is 1.6m/s

8. When car clear height is 2000 (See instruction 9) and rated speed is 1.75m/s

9. When car clear height is 2400 (See instruction 9) and rated speed is 0.63m/s

10. When car clear height is 2400 (See instruction 9) and rated speed is 1m/s

11. When car clear height is 2400 (See instruction 9) and rated speed is 1.6m/s

12. When car clear height is 2400 (See instruction 9) and rated speed is 1.75m/s

13. When rated speed is 0.63m/s

14. When rated speed is 1m/s

15. When rated speed is 1.6m/s

16. When rated speed is 1.75m/s
- Instructions:
1. Please contact Shanghai Mitsubishi Elevator Company (SMEC) for the detailed civil construction requirements.

2. When the offset landing distance is over 1m, the client shall set the safety door.

3. If the specification is out from scope of the above, please contact novel standard design department of SMEC.

4. Multimedia LCD system is available as non-standard.

5. The Overhead for corresponding car clear height in civil construction drawing is based on the 100mm ceiling thickness, i.e. ZC-CHN4 is selected as suspended ceiling (suspended ceiling thickness is 20mm), non-standard design is required.

6. When the door open type is D2C or D2CG, two pieces of car operation panels will be set at both openings as default.

7. Only the main car operation panel need to be confirmed in the technical specification of the contract.

8. If self-selective design for the car is selected, the default material and color of the entrance upper panel is the same as that of the floor wall. If integrated design is chosen, the default material and color of the entrance upper panels is the catalogue. If there is any change, non-standard design is required.

9. Only one type among the landing indicator and triage landing indicator can be chosen. Otherwise non-standard design is required.

Item	Specifications	Remark
Speed (m/s) Capacity (kg)	0.63 1.0 1.6 1.75	
	320 450 550 630	
	450 550 630 800	
	1050 1275 1600 1800	
	2000 2250 2500 2800	
Enhance the Height of TR (m)	2.6-12 2.6-12 2.6-35 2.6-55 2.6-80	When capacity is ≤ 630kg. When capacity is ≤ 630kg. When capacity is ≤ 630kg. When capacity is ≤ 630kg.
	2.5 2.5 2.18 2.28 2.28	When capacity is ≤ 630kg. When capacity is ≤ 630kg. When capacity is ≤ 630kg.
The Number of Stops (rotations)	2.5 2.18 2.28 2.28	When capacity is ≤ 630kg. When capacity is ≤ 630kg. When capacity is ≤ 630kg.
	2.18 2.28 2.28	When capacity is ≤ 630kg. When capacity is ≤ 630kg. When capacity is ≤ 630kg.
Operation Mode	1C-28C, 2C-3M21 1C-28C, 2C-3M21, 2C-11S-21, 3C-11S-21, 4C-11S-21	When capacity is ≤ 630kg. When capacity is ≤ 630kg.
	2C-11S-21, 3C-11S-21, 4C-11S-21	When capacity is ≤ 630kg.
Control Mode	1C-28C, 2C-3M21, 2C-11S-21, 3C-11S-21, 4C-11S-21	When capacity is ≤ 630kg.
	2C-11S-21, 3C-11S-21, 4C-11S-21	When capacity is ≤ 630kg.
CMT Position	Side Mounted Not Configured	When capacity is ≤ 630kg.
	Side Mounted Not Configured	When capacity is ≤ 630kg.
CMT Safety Gear	1D1G 1D1G	When capacity is ≤ 630kg.
	1D1G 1D1G	When capacity is ≤ 630kg.
Door Opening Type	Side Opening Center Opening	When capacity is ≤ 630kg.
	Side Opening Center Opening	When capacity is ≤ 630kg.
Door Opening Method	Left Side Opening, Right Side Opening Guided Support	When capacity is ≤ 630kg.
	Left Side Opening, Right Side Opening Guided Support	When capacity is ≤ 630kg.
Support Method of Traciton	Guided Support Hoistway wall support, Guided support	When capacity is ≤ 630kg.
	Guided Support Hoistway wall support, Guided support	When capacity is ≤ 630kg.
Machine	Hoistway Support Hoistway Support	When capacity is ≤ 630kg.
	Hoistway Support Hoistway Support	When capacity is ≤ 630kg.
Dynamic Power	380V 50Hz 3-phase 5-wire 220V/50Hz single phase	When capacity is ≤ 630kg.
	380V 50Hz 3-phase 5-wire 220V/50Hz single phase	When capacity is ≤ 630kg.
Lighting Power	P-04 P-04	When capacity is ≤ 630kg.
	P-04 P-04	When capacity is ≤ 630kg.
Specification Code	P-06 P-07	When capacity is ≤ 630kg.
	P-06 P-07	When capacity is ≤ 630kg.
P-08	P-10 P-10	When capacity is ≤ 630kg.
	P-10 P-10	When capacity is ≤ 630kg.
P-14W, P-14D	P-14W, P-14D P-17W, P-17D	When capacity is ≤ 630kg.
	P-14W, P-14D P-17W, P-17D	When capacity is ≤ 630kg.
P-21W, P-21D	P-21W, P-21D P-24W, P-24D	When capacity is ≤ 630kg.
	P-21W, P-21D P-24W, P-24D	When capacity is ≤ 630kg.
P-26	P-26 P-30	When capacity is ≤ 630kg.
	P-26 P-30	When capacity is ≤ 630kg.
P-33	P-33 P-33	When capacity is ≤ 630kg.
	P-33 P-33	When capacity is ≤ 630kg.
Car Finishing Design	Self-selected Design Integrative Design	When capacity is ≤ 630kg.
	Self-selected Design Integrative Design	When capacity is ≤ 630kg.
Car Integrated Design Code	ZCD-003G, ZCD-005T ZCD-003G, ZCD-005T	When capacity is ≤ 630kg.
	ZCD-003G, ZCD-005T ZCD-003G, ZCD-005T	When capacity is ≤ 630kg.
ZCD-003G, ZCD-005T	ZCD-003G, ZCD-005T ZCD-003G, ZCD-005T	When capacity is ≤ 630kg.
	ZCD-003G, ZCD-005T ZCD-003G, ZCD-005T	When capacity is ≤ 630kg.
ZCD-004G	ZCD-004G ZCD-004G	When capacity is ≤ 630kg.
	ZCD-004G ZCD-004G	When capacity is ≤ 630kg.
Noting (Door Still Bracket)	Concrete noting by others. Steel noting by SMEC.	When capacity is ≤ 630kg.
	Concrete noting by others. Steel noting by SMEC.	When capacity is ≤ 630kg.
Minimum Landing Height (mm)	2800 2800	When capacity is ≤ 630kg.
	2800 2800	When capacity is ≤ 630kg.
Display Range of Landing	B1, B2, B3, B, G, M, -1, -2, -3, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48	When capacity is ≤ 630kg.
	B1, B2, B3, B, G, M, -1, -2, -3, 1, 2, 3, 4, 5, 6, 7, 8, 9, 10, 11, 12, 13, 14, 15, 16, 17, 18, 19, 20, 21, 22, 23, 24, 25, 26, 27, 28, 29, 30, 31, 32, 33, 34, 35, 36, 37, 38, 39, 40, 41, 42, 43, 44, 45, 46, 47, 48	When capacity is ≤ 630kg.



上海三菱电梯有限公司
SHANGHAI MITSUBISHI ELEVATOR CO., LTD

[illegible]